




# Ondatherm® T

This roof insulated sandwich panel has a cover width of 1 000 mm. Made of a polyisocyanurate (PIR) and two prepainted steel facings, its outer facing is trapezoidal.

- For low and medium hygrometry buildings
- PIR foam PRT-Hexacore®
- ACERMI certification
- Excellent airtightness thanks to the nesting and joints system minimizing thermal bridges
- Classification Broof (t3)
- Reaction to fire B-s2,d0
- Validated for use in 10 types of Public Access Buildings (ERP) -[Contact us](#)
- Fully adapted to housing subject to follow up specific composition:[consult us](#)
- Standard thickness of facings: External side 0.60 mm/Internal side 0.40 mm
- 8 thicknesses of insulation core available, from 30 to 140 mm
- Visible fixings
- For a safer installation: choose Ondagrip (combination of Ondatherm T with outer facing coated in [Tectova](#))

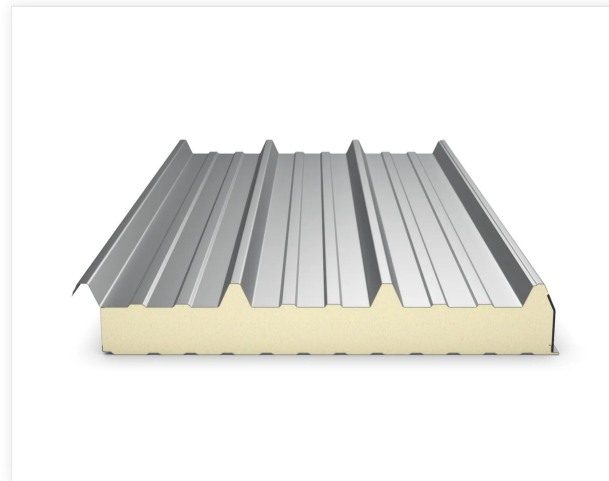

Contact us



## Properties

---

Request informations



## Accessories

---


Request informations



## Related products


---

## Related products

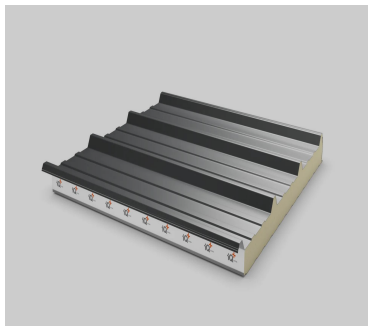


Ondatherm® T iQ+

PUR/PIR foam sandwich  
panels

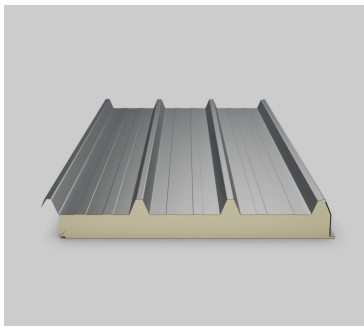

Ondatherm® 1001 TS

PUR/PIR foam sandwich  
panels

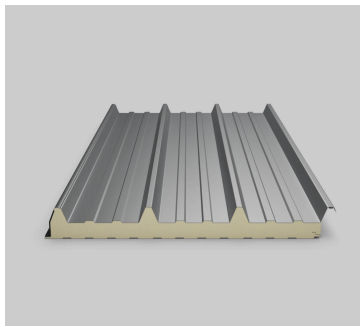

Ondatherm® 1001

PUR/PIR foam sandwich  
panels

## Technical documents

---

Request informations



## Technical & commercial documentation

---

Request informations

