

TP 32

Equipped with a water lock, this profile offers extra protection against water infiltration at the side overlap. Suitable for most roofs with slopes down to 14 degrees.

- **Material:** Hot-dip galvanized painted steel sheet
- **Thickness:** 0.50 – 0.60 – 0.65 – 0.75 mm
- **Weight:** 4.70 – 5.64 – 6.11 – 7.05 kg/m²
- **Effective Width:** 1,020 mm
- **Length:** 750 – 10,000 mm
- **Profile Height:** 32 mm
- **Water Lock:** Yes



Contact us 

Properties


Request informations 

Accessories

Request informations 


Related products

Related products

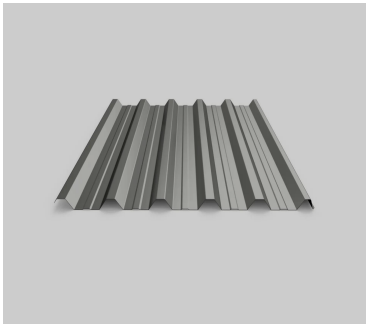


TP 32R

Trapezoidal profiles

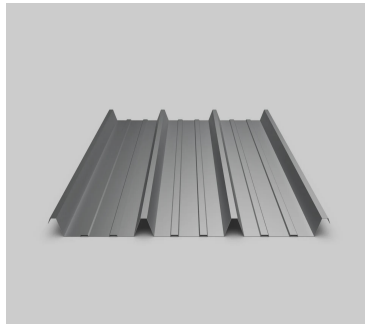


Trapeza® 3.333.45T

Trapezoidal profiles

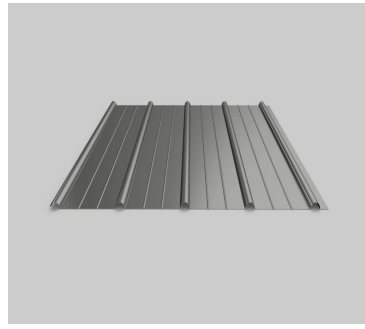


Pannplåt 1250

Trapezoidal profiles

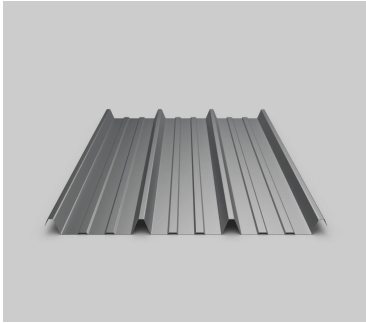


Trapeza® 3.333.39T

Trapezoidal profiles

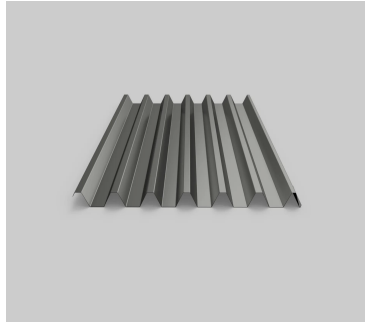


TP45

Trapezoidal profiles

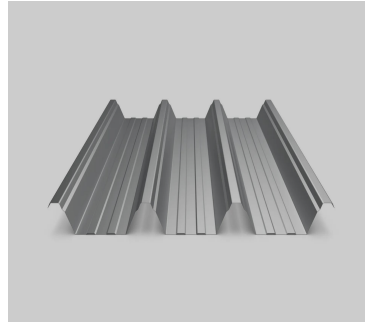


Trapeza® 3.333.79T

Trapezoidal profiles

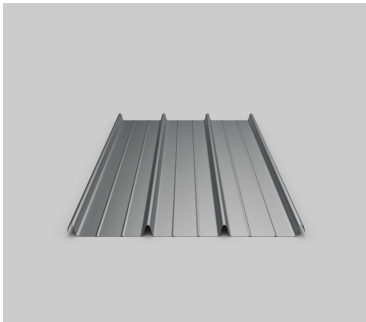

Authentique 3.283.29T

Trapezoidal profiles

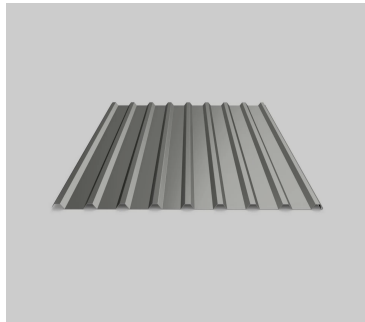


TP 17

Trapezoidal profiles


Technical documents

Documents



EPD coated low profiles


[View document](#) →



Monteringsanvisning TP

[View document](#) →

Technical & commercial documentation



Produktkatalog Sverige

[View document](#) →