



Promirock® N 85

Promirock® N 85 is a technically advanced, in-house produced panel with a mineral wool insulated core and two organically coated steel surfaces.

It is available in two versions with densities of 85 and 125 kg/m³ and a nominal thickness ranging from 100 to 300 mm (see Thicknesses). Each density option offers a choice of 0.5 mm or 0.63 mm steel cladding, which can be combined on the interior and exterior (see Profiles).

- Resistant to climate and weather exposure
- Provides high energy efficiency and low U-values
- Offers excellent thermal comfort and durability
- Suitable for both new construction and renovation projects
- Aesthetic and functional design working in harmony
- Can be installed both vertically and horizontally
- Ideal for applications such as sports arenas, warehouses, industrial buildings, and offices

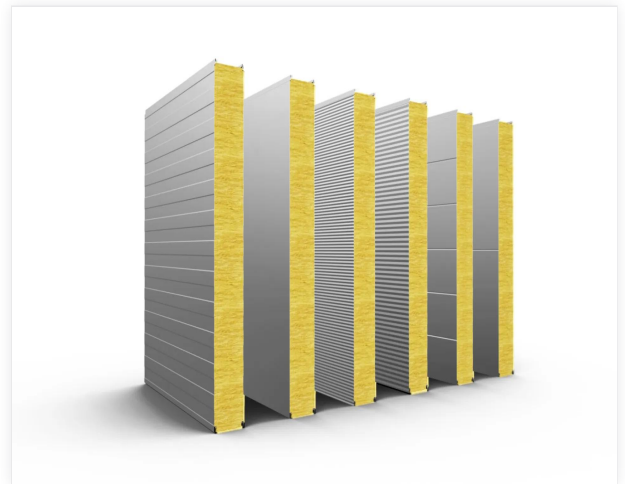

Contact us



Properties

Request informations




Accessories

Request informations



Related products

Related products

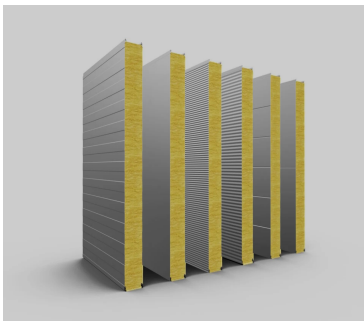

Promirock® N 125

Non combustible sandwich panels

Technical documents

Documents



Monteringsanvisning Promirock N

[View document](#) →



EPD Promirock N

[View document](#) →



Produktkatalog Promirock N

[View document](#) →

Technical & commercial documentation

[Request informations](#) →